



FULL STRIKE LTD

[www.fullstrikegroup.com](http://www.fullstrikegroup.com)








# LED

[www.fullstrikegroup.com](http://www.fullstrikegroup.com)

**LED**



1



**Parameter**

Part No. 产品型号	Voltage 电压	LED type 光源	LEDs/m 灯数/m	Watts/m 每米功率	PCB width PCB板宽	Cut Length (LED QTY)	Max.Length 长度
HXD5050-30	12/24V	5050	30	≤7.2W/M	10mm	3/6	5M
HXD5050-60	12/24V	5050	60	≤14.4W/M	10mm	3/6	5M
HXD5050-96	12/24V	5050	96	≤23.0W/M	15mm	3/6	5M



2

**12V SMD 3014/5630 Strip Light**




**Parameter**

Part No. 产品型号	Voltage 电压	LED type 光源	LEDs/m 灯数/m	Watts/m 每米功率	PCB width PCB板宽	Cut Length (LED QTY)	Max.Length 长度
HXD3014-120	12/24V	3014	120	≤14.4W/M	8mm	3/6	5M
HXD3014-240	12/24V	3014	240	≤28.8W/M	10mm	3/6	5M
HXD5630-60	12/24V	5630	60	≤14.4W/M	10mm	3/6	5M
HXD5630-72	12/24V	5630	72	≤17.3W/M	10mm	3/6	5M



3

**SMD3528/2835 LED Strip(110/240V)**

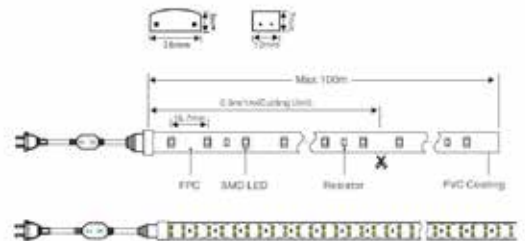

**Parameter**

Part No. 产品型号	Voltage 电压	LED Type 光源	LEDs/m 灯数/m	Watts/m 每米功率	PCB width PCB板宽	Connecting Length	Max.Length 长度
HXH-2835-60	110/240V	2835	60	≤6.6W/M	5mm	0.5m/1m	100M
HXH-2835-144	110/240V	2835	144	≤10.5W/M	10mm	0.5m/1m	100M
HXH-2835-180	110/240V	2835	180	≤10.5W/M	12mm	0.5m/1m	100M
HXH-2835-120BB	110/240V	2835	120	≤5.8W/M	5mm	0.5m/1m	100M



**LED**



4

**LED Middle Neon Flexible Light**




**Parameter**

Item No 产品型号	Voltage 电压	Size 规格	Bulb Qty/m 每米灯珠数	Watts/m 每米功率	Unit Length 单元长度	Length 长度
HXN-2835	110/220V	11*18mm	60pcs	9W/m	0.5/1m	50m
HXN-2835	110/220V	11*18mm	120pcs	9W/m	0.5/1m	50m



5

**SMD5050 LED Strip(110/220V)**

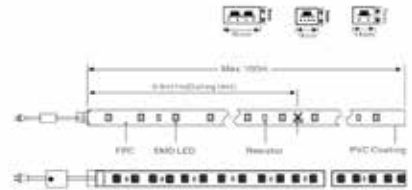

**Parameter**

Part No. 产品型号	Voltage 电压	LED Type 光源	LEDs/m 灯数/m	Watts/m 每米功率	PCB width PCB板宽	Connecting Length	Max.Length 长度
HXH-5050-03	110/240V	5050	30	<13.5W/M	8mm	0.5m/1m	100M
HXH-5050-06	110/240V	5050	60	<26.5W/M	13mm	0.5m/1m	100M



6

**LED Middle Neon Flexible Light**



**Parameter**


Item No 产品型号	Voltage 电压	Size 规格	Bulb Qty/m 每米灯珠数	Watts/m 每米功率	Unit Length 单元长度	Length 长度
HXN-2835	110/220V	11*18mm	60pcs	9W/m	0.5/1m	50m
HXN-2835	110/220V	11*18mm	120pcs	9W/m	0.5/1m	50m

LED



7

LED Rose Light-round 2 wires

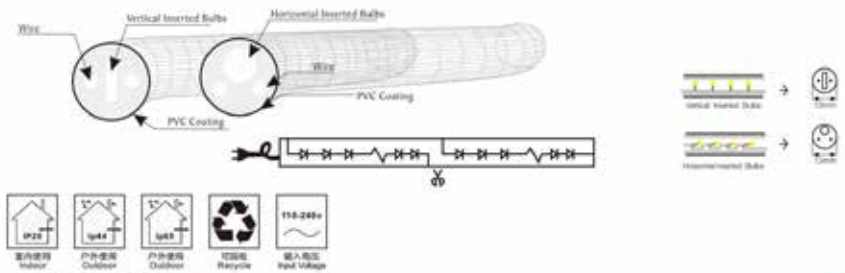

Parameter

Part No. 产品型号	Diameter 直径	Voltage 电压	Watts/m 每米功率	Bulb Qty/m 每米灯泡数	Unit Length 单元长度	Max.Length 长度
LXD-2W	11-13mm	220/240V	≤2.2W/M	24/30/36	2m	100M
LXD-2W	11-13mm	110/127V	≤4.4W/M	24/30/36	1m	100M
LXD-2W	11-13mm	24V	≤2.0W/M	36	0.17m	30M
LXD-2W	11-13mm	12V	≤2.2W/M	36	0.11m	15M



T5 tube

LED T5 tube all-in-one  
base type:all-in-one  
brightness degradation:~3% 1000 hours  
CCT:2700K-6500K  
voltage: AC85-265V 50/60Hz



Item NO	Power	Lumen	CRI	Beam Angle	Tube Length
CL502-10W	10W	900	80	180°	588mm
CL503-14W	14W	1260	80	180°	898mm
CL504-19W	19W	1700	80	180°	1198mm
CL505-25W	25W	2250	80	180°	1498mm



T8 TUBE

LED T8 tube  
base type:G13  
brightness degradation:~3% 1000 hours  
CCT:2700K-6500K  
voltage: AC85-265V 50/60Hz



Item NO	Power	Lumen	CRI	Beam Angle	Tube Length
CLTL02-10W	10W	900	80	180°	588mm
CLTL03-14W	14W	1260	80	180°	898mm
CLTL04-19W	19W	1700	80	180°	1198mm
CLTL05-25W	25W	2250	80	180°	1498mm

**LED**



SD-A

aluminum spotlight with SMD3030  
 base type:MR16, GU10  
 brightness degradation:~3% 1000 hours  
 CCT:2700K-6500K  
 voltage: 12-24V/85-265V 50/60Hz



Item NO	Power	Lumen	CRI	Beam Angle	Product Siz	Can Replace
SD-1801-A	3*1W	250	80	38°	Ø50*52mm	30W
SD-1802-A	4*1W	320	80	38°	Ø50*52mm	40W
SD-1803-A	5*1W	400	80	38°	Ø50*52mm	50W
SD-1804-A	7*1W	560	80	38°	Ø50*52mm	70W
SD-1801-A-COB	3W	250	80	120°	Ø50*52mm	30W
SD-1801-A-COB	5W	400	80	120°	Ø50*52mm	50W



SD-F

aluminum spotlight  
 base type:MR16, GU10  
 brightness degradation:~3% 1000 hours  
 CCT:2700K-6500K  
 voltage: 12-24V/85-265V 50/60Hz



Item NO	Power	Lumen	CRI	Beam Angle	Product Siz	Can Replace
SD-1801-F-COB	3W	250	80	120°	Ø50*50mm	30W
SD-1801-F-COB	5W	400	80	120°	Ø50*50mm	50W



SD-D

aluminum spotlight  
 base type:MR16, GU10, JDRE14, JDRE27  
 brightness degradation:~3% 1000 hours  
 CCT:2700K-6500K  
 voltage: 12-24V/85-265V 50/60Hz



Item NO	Power	Lumen	CRI	Beam Angle	Product Siz	Can Replace
SD-1801-D	3W	250	80	120°	Ø50*57mm	30W
SD-1801-D	5W	400	80	120°	Ø50*57mm	50W



aluminum spotlight  
 base type:MR16, GU10  
 brightness degradation:<3% 1000 hours  
 CCT:2700K-6500K  
 voltage: 12-24V/85-265V 50/60Hz



SD-M

Item NO	Power	Lumen	CRI	Beam Angle	Prduct Siz	Can Replace
SD-1802-M	4*1W	320	80	38°	Ø50*55mm	40W
SD-1801-M-COB	3W	250	80	120°	Ø50*55mm	30W
SD-1803-M-COB	5W	400	80	120°	Ø50*55mm	50W



aluminum spotlight  
 base type:MR16, GU10  
 brightness degradation:<3% 1000 hours  
 CCT:2700K-6500K  
 voltage: 12-24V/85-265V 50/60Hz



SD-L

Item NO	Power	Lumen	CRI	Beam Angle	Prduct Siz	Can Replace
SD-1805-L	4*2W	560	80	38°	Ø62*65mm	80W



aluminum spotlight  
 base type:MR16, GU10  
 brightness degradation:<3% 1000 hours  
 CCT:2700K-6500K  
 voltage: 12-24V/85-265V 50/60Hz



SD-H

Item NO	Power	Lumen	CRI	Beam Angle	Prduct Siz	Can Replace
SD-1803-H-COB	5W	400	80	120°	Ø50*75mm	50W
SD-1804-H-COB	7W	560	80	120°	Ø50*75mm	75W

**LED**



QP-A

aluminum bulb  
 base type:E27,E26,B22  
 brightness degradation:-3% 1000 hours  
 CCT:2700K-6500K  
 voltage: AC85-265V 50/60Hz



Item NO	Power	Lumen	CRI	Beam Angle	Product Siz	Can Replace
QP-1802-A	5W	400	80	180°	Ø60*115mm	40W
QP-1803-A	7W	560	80	180°	Ø60*115mm	50W
QP-1804-A	9W	720	80	180°	Ø60*115mm	60W



BG-C

Plastic Bulb  
 base type:E27,E26,B22  
 brightness degradation:-3% 1000 hours  
 Colour:Red, Yellow, Blue, White, Green  
 voltage: 1AC85-265V 50/60Hz



Item NO	Power	Lumen	CRI	Beam Angle	Product Siz
BG-1800-C	0.5W	30	80	270°	Ø45*66mm



BAW

LED Slament Bulb  
 base type:E27,E26,B22,  
 brightness degradation:-3% 1000 hours  
 CCT:2700K-6500K  
 voltage: AC95-285V 50/60Hz



Item NO	Power	Lumen	CRI	Beam Angle	Product Siz
BAW14001	2W	160	80	180°	Ø80*108mm
BAW14002	4W	320	80	180°	Ø60*108mm
BAW14003	8W	480	80	180°	Ø60*108mm
BAW14004	8W	840	80	180°	Ø60*108mm





aluminum coated plastic bulb  
 base type:E27,E26,B22  
 brightness degradation:-3% 1000 hours  
 CCT:2700K-6500K  
 voltage: AC85-265V 50/60Hz



QP-R

Item NO	Power	Lumen	CRI	Beam Angle	Product Siz	Can Replace
QP-1802-R	5W	400	80	180°	∅55*102mm	40W
QP-1803-R	7W	560	80	180°	∅60*108mm	50W
QP-1804-R	9W	720	80	180°	∅60*108mm	60W
QP-1805-R	12W	960	80	180°	∅68*132mm	75W
QP-1806-R	15W	1200	80	180°	∅68*132mm	100W



20



PAGE 10

# About Us

✉ [sales@fullstrikegroup.com](mailto:sales@fullstrikegroup.com)

[www.fullstrikegroup.com](http://www.fullstrikegroup.com)



Office: Room 302, T3, Taiziwan Commercial Building, Cruise Avenue, Nanshan District, Shenzhen, China 518067.

Factory: NO.123,Jinghui west Rd,Investment entrepreneurship center,Xaying,Ynzhou,Ningbo,China.

Germany Office: Robinson Road 7, App. 10, 55768 Hoppstädten-Weiersbach Deutschland

**FSL is standing in the market with "3 Best Policy" since the very first day of servicing customers:**

**Best Service,**

**Best Quality,**

**Best Price.**

**We 100% fully trust that you must enjoy doing business with us!**